



Wirewound Common Mode Chokes


HSF 1210 Series 0504 inch



Dimensions

Chip Size Units: mm


A	1.20±0.20
B	1.00±0.20
C	0.90 max.
D1	0.35±0.10
D2	0.35±0.10
E	0.03 min.




Specifications

Part Number	Common mode Impedance (Ω)	Test Frequency (MHz)	DC Resistance (Ω) max.	Rated Current (mA)max.	Rated Volt (Vdc)max.	Withstand Volt. (Vdc) max.	IR (Ω) min.
HSF1210F2SF-500T02	50±25%	100	0.30	250	50	125	10M
HSF1210F2SF-670T02	67±25%	100	0.30	250	50	125	10M
HSF1210F2SF-900T02	90±25%	100	0.40	200	50	125	10M

Impedance-Frequency Characteristics (Typical)

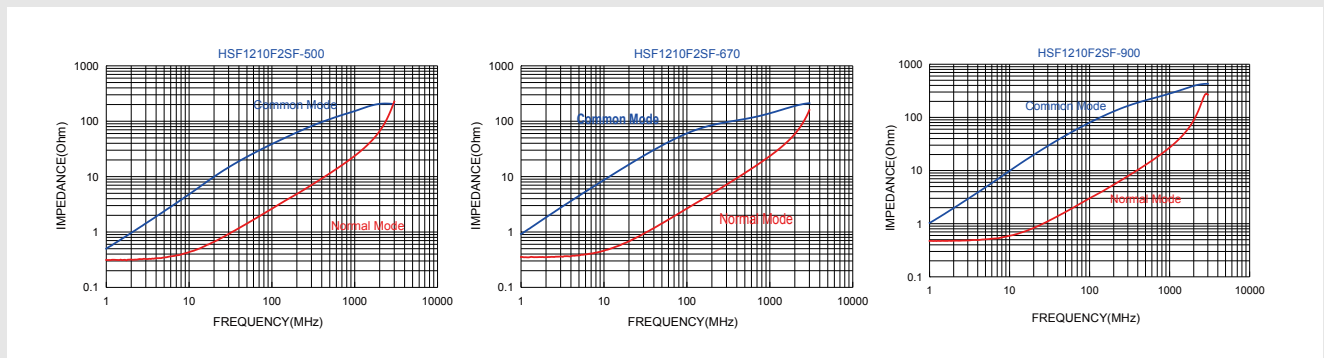

Insertion Loss Test (Typical)

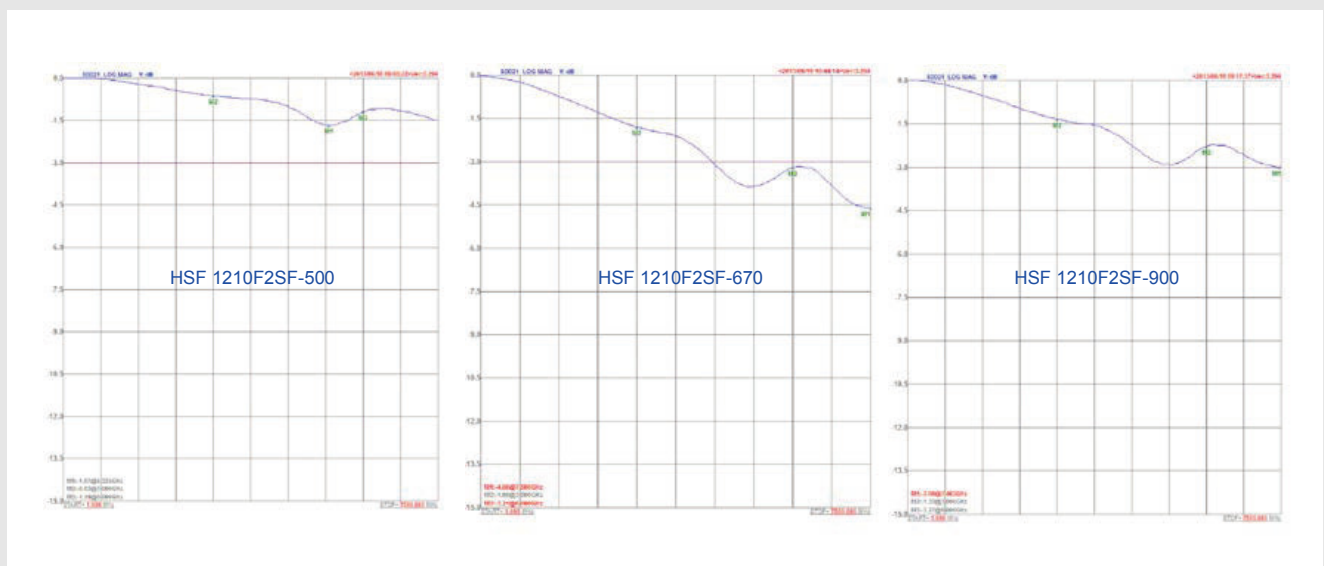

深圳市一禾兴电子有限公司
电话：0755-33564854


网址：www.ohesen.com
邮箱：kun.he@ohesen.com



Dimensions

Chip Size Units: mm


A	2.00±0.20
B	1.20±0.20
C	1.20±0.20
D1	0.55±0.10
D2	0.46±0.10
E	0.15±0.10



Specifications

Part Number	Common mode Impedance (Ω)	Test Frequency (MHz)	DC Resistance (Ω) max.	Rated Current (mA)max.	Rated Volt (Vdc)max.	Withstand Volt. (Vdc) max.	IR (Ω) min.
HSF2012F2SF-500T04	50 ± 25%	100	0.25	400	50	125	10M
HSF2012F2SF-670T04	67 ± 25%	100	0.30	400	50	125	10M
HSF2012F2SF-900T04	90 ± 25%	100	0.30	400	50	125	10M

Impedance-Frequency Characteristics (Typical)

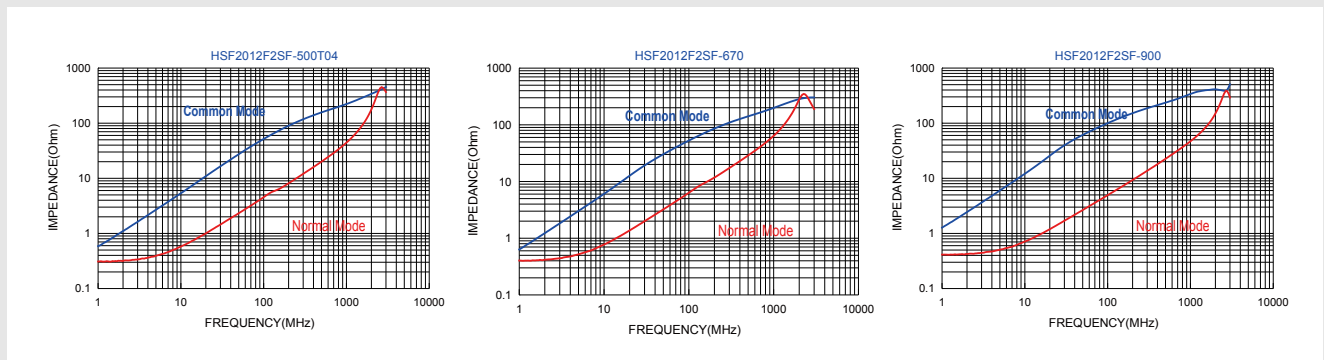

Insertion Loss Test (Typical)

